

Overview


The F15 Optical Distribution Frame is a high-density, modular platform designed for efficient fibre splicing, termination, and patching. Its compact 300 mm depth and front-access architecture enable seamless installation in space-constrained environments, including wall-mounted, back-to-back, and end-of-row configurations.

Supporting up to 184 SpliceGroup™ cassettes, the F15 provides scalable capacity with integrated cable management and a central patching area for clean routing between cassettes and network applications. The system is compatible with all SpliceGroup left and right-handed cassette types—Splice, Patch, and Passive Optical Devices and accommodates diverse cable formats with both top and bottom entry options.



Standard patch-cord lengths minimise cabling complexity and simplify inventory control. With support for up to 4,400 fibre connections using Small Form Factor (SFF) connectors, the F15 is engineered for rapid deployment, high-density fibre management, and future-ready scalability.

Main Features


- Modular, customisable design with capacity for up to 184 cassettes
- Supports up to 4,400 fibre connections
- Clear routing paths for simplified fibre identification tracing
- Standard patch cord lengths to streamline stock management
- Compatible with all SpliceGroup left and right cassette types (Splice, Ribbon, Patch, Passive)
- High-density cable distribution with multiple breakout options
- Top and bottom cable entry configuration
- Front access supports wall-mounted deployment, optimizing space usage
- Suitable for cross-connect or point to point architectures.

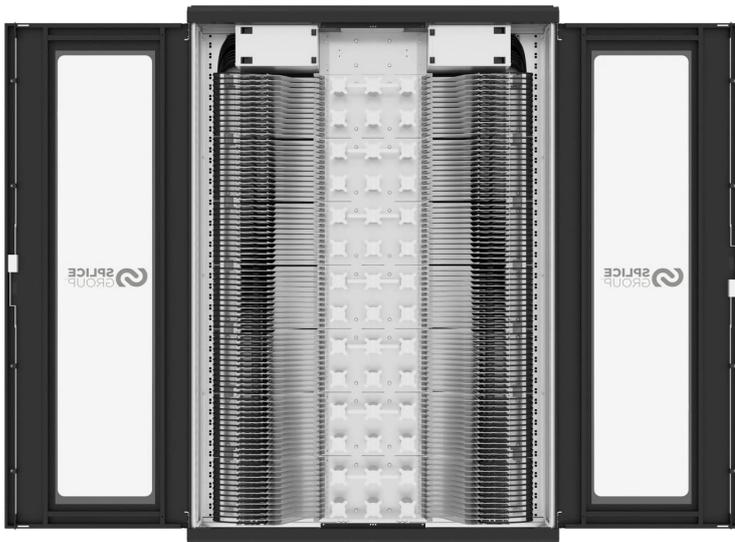



F15 Optical Distribution Frame - 168 Tray

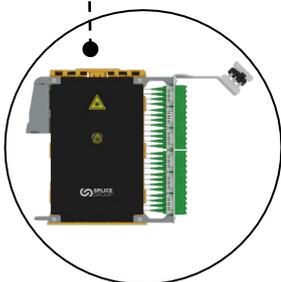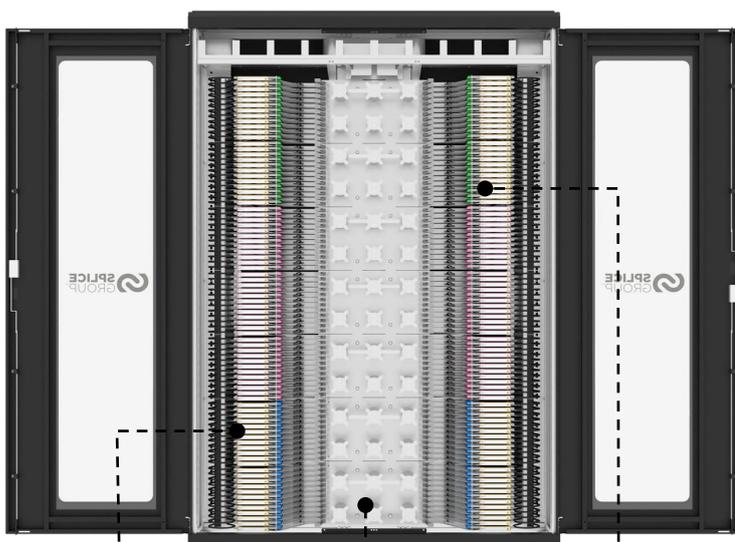

Right Hand Cassette

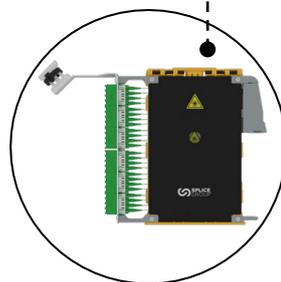

Left Hand Cassette

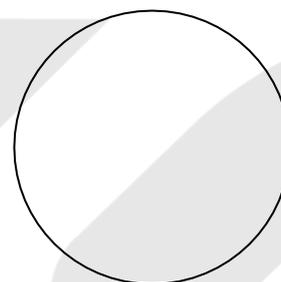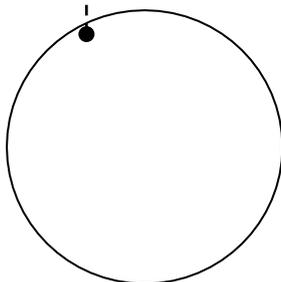

Premium Cable Management & Usability

Specifications

General Specifications

Application	Data Centre, Co-Location, Enterprise, FTTX
Product Type	Optical Distribution Frame (ODF)
Cassette Option	All
Compatibility	Conventional Cable, Ribbon, F-tube, Blown Fibre, Plug & Play

Mechanical Characteristics

Dimensions (HxWxD)	2200mm x 1500mm x 300mm (86.61 in x 59.05 in x 11.81 in)
Weight (Approximately)	275 kg (606.27 lb)

Material

Frame	Aluminium
Doors and Panel	Steel

Colour

Side Doors and Panels	Light Grey (RAL 7035)
	Jet Black (RAL 9005)

ODF Options

Cable Entry & Exit	Top and Bottom
Frame Colour Available	Grey and Black

Dimension & Images

