



F6 Optical Distribution Frame- 60 Tray

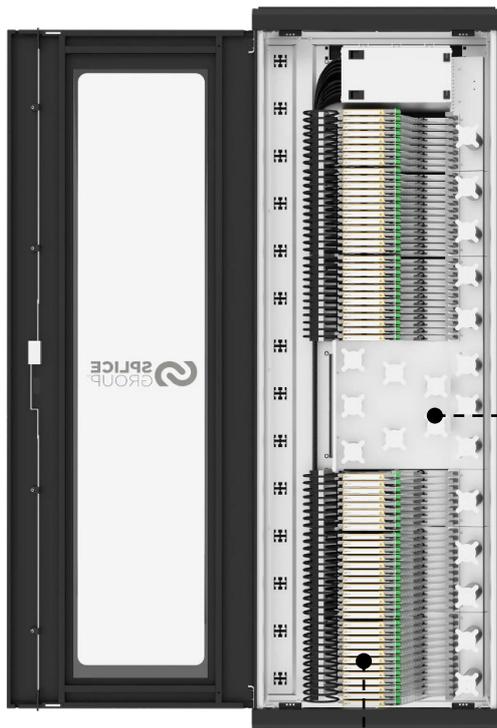

Right Hand Cassette

Overview


The **F750 Optical Distribution Frame** is a high-density, modular cross-connect platform designed for efficient fibre splicing, termination, and patching. Its compact 300 mm depth and front-access architecture enable seamless installation in space-constrained environments, including wall-mounted, back-to-back, and end-of-row configurations.

Supporting up to 60 SpliceGroup™ cassettes, the F750 provides scalable capacity with integrated cable management and a centralised patching area for clean routing between cassettes and network applications. The system is compatible with all right-handed SpliceGroup cassette types—Splice, Patch, and Passive Optical Devices and accommodates diverse cable formats with both top and bottom entry options.


Standard patch-cord lengths minimise cabling complexity and simplify inventory control. With support for up to 1,440 fibre connections using Small Form Factor (SFF) connectors, the F750 is engineered for rapid deployment, high-density fibre management, and future-ready scalability.

Main Features

- Modular, customisable design with capacity for up to 60 cassettes
- Supports up to 1440 fibre connections
- Clear routing paths for simplified fibre identification and tracing
- Standard patch cord lengths to streamline stock management
- Compatible with all SpliceGroup cassette types (Splice, Ribbon, Patch, Passive)
- High-density cable distribution with multiple breakout options
- Top and bottom cable entry configuration
- Front access supports wall-mounted deployment, optimising space usage
- Suitable for cross-connect or point to point architectures.

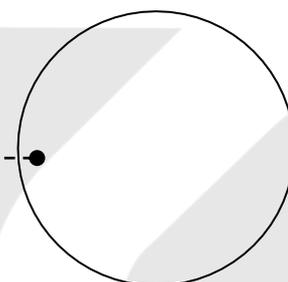

Premium Cable Management

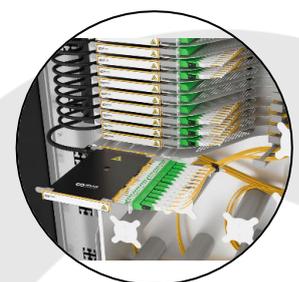

Specifications

General Specifications

Application	Data Centre, Co-Location, Enterprise, FTTX
Product Type	Optical Distribution Frame (ODF)
Cassette Option	All
Compatibility	Conventional Cable, Ribbon, F-tube, Blown Fibre, Plug & Play

Mechanical Characteristics

Dimensions (HxWxD)	2200mm x 750mm x 300mm (86.61 in x 29.52 in x 11.81 in)
Weight (Approximately)	130 kg (286.60 lb)

Material

Frame	Aluminium
Doors and Panel	Steel

Colour

Side Doors and Panels	Light Grey (RAL 7035)
	Jet Black (RAL 9005)

ODF Options

Cable Entry & Exit	Top and Bottom
Frame Colour Available	Grey and Black

Dimension & Images

