
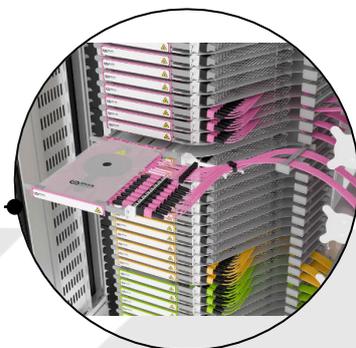


Patchcord managers

Patchcord Arm

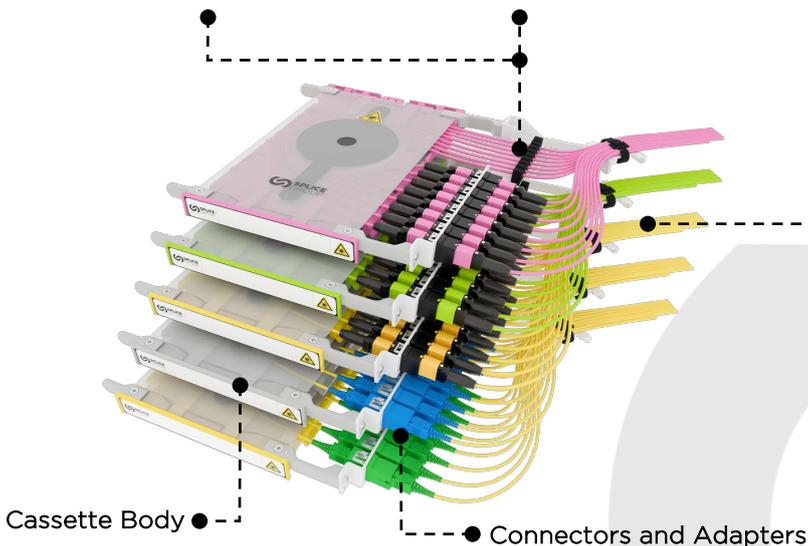

Cassette Installed in Optical Distribution Frame

### Overview

**The Patching** is a highly versatile, plug-and-play solution for patching, connecting, and managing fibre-optic infrastructure. Available in a range of colours and in both left-and right-hand variants, it can be customised to suit a wide range of fibre applications. Supplied with factory-fitted adapters, the cassette arrives ready for rapid deployment.

Engineered for seamless compatibility across the SpliceGroup™ portfolio—including Optical Distribution Frames, Wall Boxes, and Rack-Mounted Systems—it ensures a consistent and intuitive user experience. Its side-facing design maintains bend-radius control throughout, supporting clean, well-organised routing of incoming and outgoing patch cords.

The cassettes' slide-and-pivot mechanism provides unrestricted access during patching operations. Accommodating up to eight ports with MTP®/MPO and SC connector options, the cassette maximises density without compromising accessibility—making moves, adds, and changes (MACs) simple, safe and efficient.

### Main Features

- Plug-And-Play
- Designated Fibre Routing
- 8 Port Capacity
- Available in Left & Right Hand Configuration
- Compatible with MTP®/MPO and SC connectors
- Bend Radius Controlled
- Side-facing With Integrated Laser Safety Features
- Available in SM, OM1 - OM5.

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of SpliceGroup™ is indicative only and shall not be binding on SpliceGroup™ or be treated as constituting a representation on the part of SpliceGroup™. SpliceGroup™ reserves the right to make modifications to this document without prior notice.

## Specifications

### General Specifications

Application	Data Centre, FTTX, Telecom, Road, Rail, Utility
Product Type	Fibre Optic Hardware
Mounting Technology	Optical Distribution Frame, Wall Box, Panels
Compatibility	Patchcords, MTP®/MPO Patchcords, Pre-Terminated Cables

### Design Hardware

Fibre Optic Type	SM (G657A1), OM1 - OM5
Adapter Type	MTP®/MPO, SC
Fibre Capacity	Up to 8 Ports

### Mechanical Characteristics

Dimensions (HxWxD)	20mm x 280mm x 205mm (0.78 in x 11.02 in x 8.07 in)
Weight (Approximately)	0.26 kg (0.57 lb)

### Material

Fibre Optic	Glass, Plastic
Adapters	Metal, VO Rated Plastic
Cassette	VO Rated Plastic
Accessories	Metal, Plastic

### Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 202/95/EG
------	--

### Shipping Information

Unit per Box	1
Packing Dimension (HxWxD)	23mm x 300mm x 207mm (0.90 in x 11.81 in x 8.14 in)
Typical Shipping Weight	0.34 kg (0.74 lb)