




Front View



Rear View





Front Management

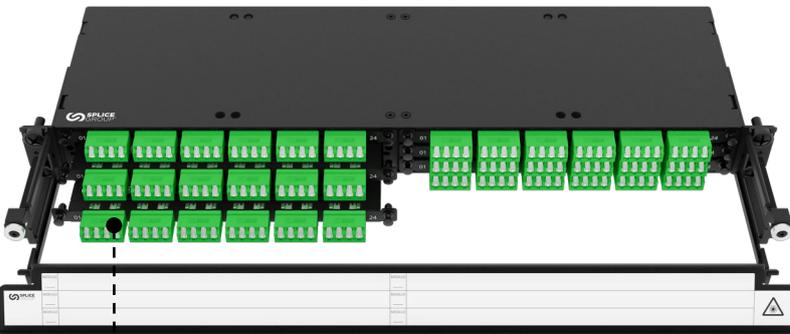


Fully Loaded - 144F



Single Mode



VSFF Connector



Multimode (OM4, OM5)



## Overview

**The SpliceGroup™ 6-Way Customer Termination Panel (CTP)** is a compact, modular 1U front-access panel designed for high-density fibre management. It supports up to six SpliceGroup™ Slimline Modules (SLM), providing a capacity of up to 144 fibres with small-form-factor connectors.

The fibre count can be increased to 432 fibres using very small form factor (VSFF) connectors. Front-loading modules enable quick configuration changes without disturbing existing fibres.

The split-chassis design allows independent module handling, and optional rear cable-management accessories are available.

Includes a front fibre management kit for organised fibre routing and a port mapping label for easy identification.

## Main Features

- Compatible with 19", 21", 23" racks and ETSI mounts
- Simple installation and universal rack fit
- Independent module management
- Front fibre management; optional rear cable management
- Supports 6 x modules per 1U (up to 144 Fibres)
- Scalable design with mix-and-match modules
- Suitable for passive optical devices (CWDM, DWDM, Splitters)
- Compatible with various connector types (SM, OM1 - OM5).

## Specifications

### General Specifications

Application	Data Centre, Co-Location, Enterprise, FTTX
Product Type	Fibre Optic Hardware
Mounting Technology	Rack and Cabinet
Compatibility	Conventional Cable, F-tube, Blown Fibre, Plug & Play

### Design Hardware

Height (Rack Unit)	1U
Unit per Patch Panel	6
Fibre Capacity	144 Fibres (SFF), 432 Fibres (VSFF)
Cable Entry	Rear

### Mechanical Characteristics

Dimensions (HxWxD)	44mm x 483mm x 170mm (1.73 in x 19.00 in x 6.69 in)
Weight (Approximately)	1.33 kg (2.93 lbs)

### Material

Top Body	Aluminium
Bottom Body	Mild Steel
Runners	Mild Steel

### Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 202/95/EG
------	----------------------------------------------------------

### Shipping Information

Unit per Delivery	1
Packing Dimension (HxWxD)	90mm x 500mm x 360mm (3.54 in x 19.00 in x 14.17 in)
Typical Shipping Weight	1.66 kg (3.65 lbs)

### Ordering Information

Part Number	00000186
Name	1U 19" CTP Panel 6-Way - SLM
Description	PAN-1U-B-CTP-FC-6A