



1x 24 Fibre MTP®/MPO - LCAPC



2x 12 Fibre MTP®/MPO - LCAPC

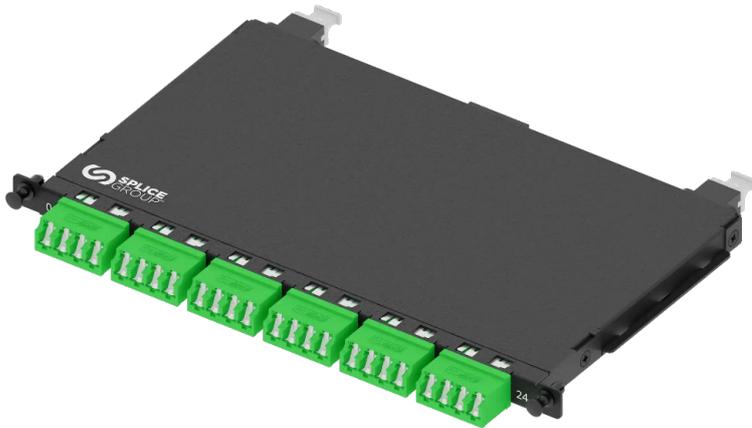

Slimline MTP®/MPO - LC Module Options

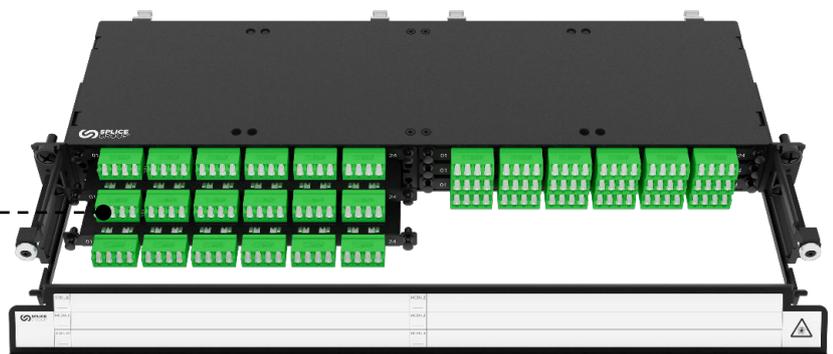

Modules Installed in  
1U 19" 6-Way HD Customer Termination Panel

## Overview

The **Slimline MTP®|MPO to LC Module** is a high-performance, plug-and-play solution engineered to facilitate the transition of MTP®/MPO cabling to LC connectivity.

Available in a range of fibre types, it can be tailored to suit a wide variety of applications. Supplied with factory-fitted MTP-LC breakouts and adapters, the module arrives ready for rapid deployment.

Designed for seamless integration with the SpliceGroup™ 6-Way Customer Termination Panel, its tool-less design allows modules to be inserted individually, without disturbing pre-installed units.

Supporting fibre breakouts of up to 24 fibres, the modules are available in two configurations: a single 1x MTP®/MPO to 24-fibre LC breakout or a dual 2x 12-fibre MTP®/MPO to 12-fibre LC breakout. This architecture maximises port density without compromising accessibility—ensuring moves, adds, and changes (MACs) remain simple, safe and efficient.

## Main Features

- Integrated Laser Safety Design
- Factory Terminated and Tested
- Plug and Play
- Base-8, 12, and 24 compatible
- Accommodating up to 24 fibre connections (SFF)
- Available in SM, OM1 - OM5.

## Specifications

### General Specifications

Application	Data Centre, FTTX, Telecom, Road, Rail, Utility
Product Type	Fibre Optic Hardware
Mounting Technology	Customer Termination Panel
Compatibility	MTP®/MPO

### Design Hardware

CTP Type	1U 19" 6-Way HD Customer Termination Panel
Connector & Adapter Type	MTP®/MPO, LC
Module Type	Slimline MTP®/MPO to LC Module
Capacity	1x 24F MTP®/MPO - LC, 2x 12F MTP®/MPO - LC
Rear Configuration	MTP®/MPO

### Optical Specification Standard

Grade Criteria; IEC 61753-1	Single Mode and Multimode Grade B
Optical Performance	IEC61300-3-34 and IEC61300-3-6 Compliant

### Mechanical Characteristics

Dimensions (HxWxD)	14mm x 218mm x 158mm (0.55 in x 8.58 in x 6.22 in)
Weight (Approximately)	0.13 kg (0.28 lb)

### Material

Module	Aluminium
Adapter	Metal, Plastic
Fibre Optic Products	Metal, Plastic, Glass

### Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 202/95/EG
------	--

### Shipping Information

Unit per Box	1
Packing Dimension (HxWxD)	23mm x 300mm x 207mm (0.90 in x 11.81 in x 8.14 in)
Typical Shipping Weight	0.21 kg (0.48 lb)