


Pre-Terminated LCAPC SM Module - Cable



Slimline Pre-Terminated Module Options

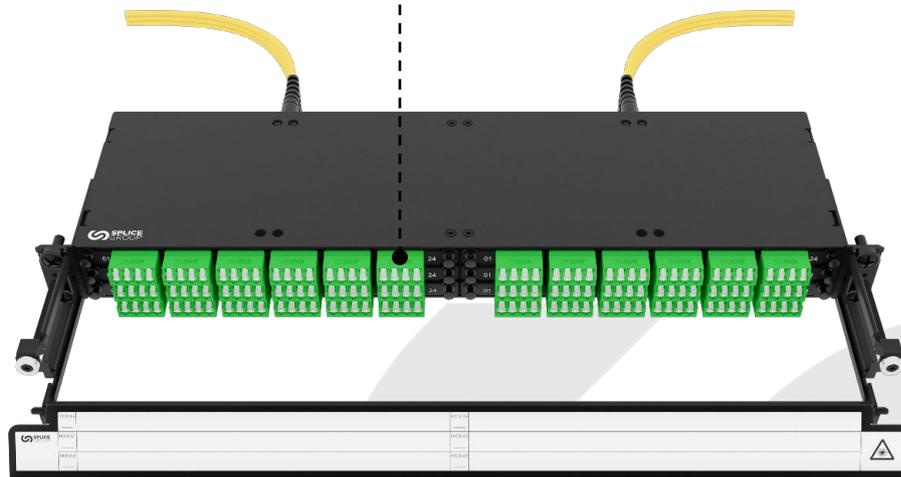

Modules Installed in
1U 19" 6-Way HD Customer Termination Panel

Overview

The Slimline Pre-Terminated Module is a highly versatile, pre-connectorised solution engineered to minimise optical link points and reduce installation time.

Available in a range of fibre types to support a wide variety of applications, each module is factory-terminated, fully tested, and supplied with specified cable or fibre-bundle lengths, ensuring every unit arrives ready for rapid deployment.

Designed for seamless integration with the SpliceGroup™ 6-Way Customer Termination Panel, its tool-less design allows modules to be inserted individually without disturbing any pre-installed units.

Accommodating up to 24 fibres, the pre-terminated module maximises port density without compromising accessibility—ensuring moves, adds, and changes (MACs) remain simple, safe, and efficient.

Main Features

- Integrated Laser Safety Features
- Factory Terminated and Tested
- Reduces Optical Links
- Fast Deployment
- Accommodating up to 24 fibre connections (SFF)
- Available in SM, OM1 - OM5.

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of SpliceGroup™ is indicative only and shall not be binding on SpliceGroup™ or be treated as constituting a representation on the part of SpliceGroup™. SpliceGroup™ reserves the right to make modifications to this document without prior notice.

Specifications

General Specifications

Application	Data Centre, FTTX, Telecom, Road, Rail, Utility
Product Type	Fibre Optic Hardware
Mounting Technology	Customer Termination Panel
Compatibility	Pre-Terminated Cables

Design Hardware

CTP Type	1U 19" 6-Way HD Customer Termination Panel
Connector & Adapter Type	LC, SC
Module Type	Slimline Pre-Terminated Module
Fibre Capacity	Up to 24 Fibres (SFF)

Optical Specification Standard

Grade Criteria; IEC 61753-1	Single Mode and Multimode Grade B
Optical Performance	IEC61300-3-34 and IEC61300-3-6 Compliant

Mechanical Characteristics

Dimensions (HxWxD)	12mm x 218mm x 152mm (0.47 in x 8.58 in x 5.98 in)
Weight (Approximately)	0.13 kg (0.28 lb)

Material

Module	Aluminium
Adapter	Metal, Plastic
Fibre Optic Products	Metal, Plastic, Glass

Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 202/95/EG
------	--

Shipping Information

Unit per Box	1
Packing Dimension (HxWxD)	23mm x 300mm x 207mm (0.90 in x 11.81 in x 8.14 in)
Typical Shipping Weight	0.21 kg (0.48 lb)