

Overview

The Standard Patching Module is a highly versatile, plug-and-play solution for patching, connecting, and managing fibre-optic infrastructure.

Available in a range of fibre types, it can be tailored to suit a wide variety of applications. Supplied with factory-fitted adapters, the module arrives fully prepared for rapid deployment.


Designed for seamless integration with the SpliceGroup™ 4-Way Customer Termination Panel, its tool-less design allows modules to be inserted individually, without disturbing pre-installed units.

Its compact layout maintains bend-radius control at every stage, while fibre retainers and ties support clean, well-organised fibre routing.


Accommodating up to twelve ports the module maximises port density without compromising accessibility—ensuring moves, adds, and changes (MACs) remain simple, safe and efficient.

Main Features


- Integrated Laser Safety Design
- Plug and Play
- Designated Fibre Routing
- 12 Port Capacity
- Rear Cable Management
- MTP®/MPO, LC & SC Compatible
- Available in SM, OM1 - OM5.

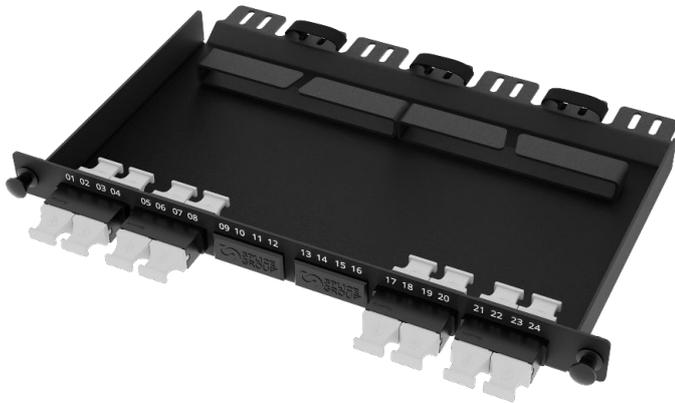

8 Port MTP®/MPO

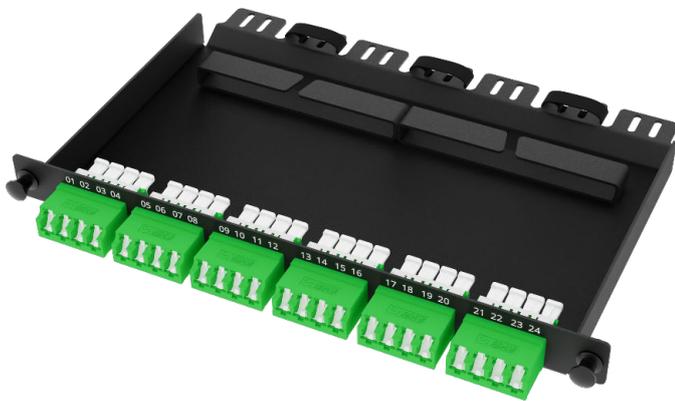

12 Port LCAPC

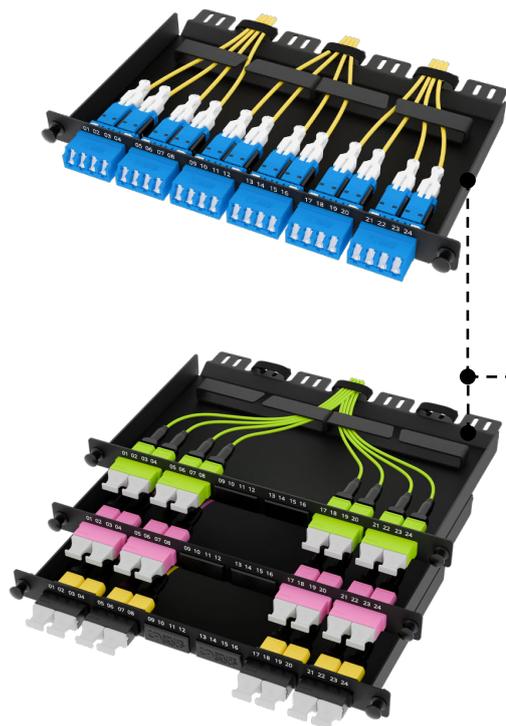

Standard Patching Module Options



Module Installed in
1U 19" 4-Way HD Customer Termination Panel

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of SpliceGroup™ is indicative only and shall not be binding on SpliceGroup™ or be treated as constituting a representation on the part of SpliceGroup™. SpliceGroup™ reserves the right to make modifications to this document without prior notice.

Specifications

General Specifications

Application	Data Centre, FTTX, Telecom, Road, Rail, Utility
Product Type	Fibre Optic Hardware
Mounting Technology	Customer Termination Panel
Compatibility	Patchcord, Pre-terminated Cable/Bundle

Design Hardware

CTP Type	1U 19" 4-Way HD Customer Termination Panel
Adapter Type	LC, SC, MTP®/MPO
Module Type	Standard Patching Module
Capacity	8, 12, 24 (LC) / up to 12 connections (MTP®/MPO, SC)

Mechanical Characteristics

Dimensions (HxWxD)	20mm x 218mm x 155mm (0.78 in x 8.58 in x 6.10 in)
Weight (Approximately)	0.15 kg (0.33 lb)

Material

Module	Aluminium
Adapter	Metal, Plastic

Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 202/95/EG
------	--

Shipping Information

Unit per Box	1
Packing Dimension (HxWxD)	23mm x 300mm x 207mm (0.90 in x 11.81 in x 8.14 in)
Typical Shipping Weight	0.21 kg (0.48 lb)