
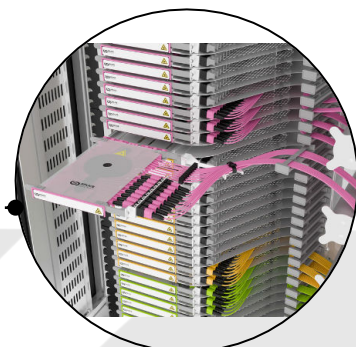


Patchcord managers

Patchcord Arm

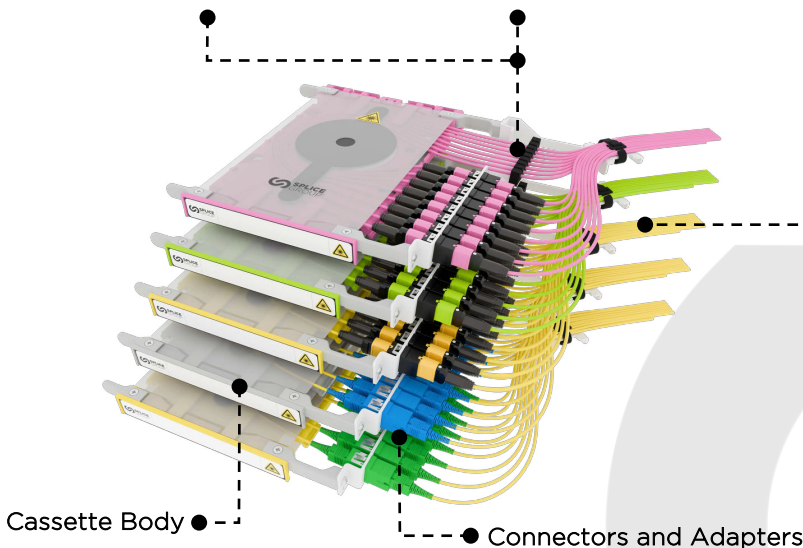

Cassette Installed in Optical Distribution Frame

Overview

The Patching Cassette is a highly versatile, plug-and-play solution for patching, connecting, and managing fibre-optic infrastructure. Available in a range of colours and in both left-and right-hand variants, it can be customised to suit a wide range of fibre applications. Supplied with factory-fitted adapters, the cassette arrives ready for rapid deployment.

Engineered for seamless compatibility across the SpliceGroup™ portfolio—including Optical Distribution Frames, Wall Boxes, and Rack-Mounted Systems—it ensures a consistent and intuitive user experience. Its side-facing design maintains bend-radius control throughout, supporting clean, well-organised routing of incoming and outgoing patch cords.

The cassettes' slide-and-pivot mechanism provides unrestricted access during patching operations. Accommodating up to eight ports with MTP®/MPO and SC connector options, the cassette maximises density without compromising accessibility—making moves, adds, and changes (MACs) simple, safe and efficient.

Main Features

- Plug and Play
- Designated Fibre Routing
- 8 Port Capacity
- Available in Left and Right Hand Configuration
- Compatible with MTP®/MPO and SC connectors
- Bend Radius Controlled
- Side-facing With Integrated Laser Safety Features
- Available in SM, OM1 - OM5.

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of SpliceGroup™ is indicative only and shall not be binding on SpliceGroup™ or be treated as constituting a representation on the part of SpliceGroup™. SpliceGroup™ reserves the right to make modifications to this document without prior notice.

Specifications

General Specifications

Application	Data Centre, FTTX, Telecom, Road, Rail, Utility
Product Type	Fibre Optic Hardware
Mounting Technology	Optical Distribution Frame, Wall Box, Panels
Compatibility	Patchcords, MTP®/MPO Patchcords, Pre-Terminated Cables

Design Hardware

Fibre Optic Type	SM (G657A1), OM1 - OM5
Adapter Type	MTP®/MPO, SC
Fibre Capacity	Up to 8 Ports

Mechanical Characteristics

Dimensions (HxWxD)	20mm x 280mm x 205mm (0.78 in x 11.02 in x 8.07 in)
Weight (Approximately)	0.26 kg (0.57 lb)

Material

Fibre Optic	Glass, Plastic
Adapters	Metal, V0 Rated Plastic
Cassette	V0 Rated Plastic
Accessories	Metal, Plastic

Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 202/95/EG
------	--

Shipping Information

Unit per Box	1
Packing Dimension (HxWxD)	23mm x 300mm x 207mm (0.90 in x 11.81 in x 8.14 in)
Typical Shipping Weight	0.34 kg (0.74 lb)